


ModularMaster

Liquid Cooled

with SPD11 Split Power Drive

Including:

- True redundancy in case of one motor failure
- Aluminum made split power drive
- Mounting brackets and silent blocks
- Live PTO available
- Vector control inverter IP65
- NMEA2000 compatible (Apply Transfluid)
- Main switch and main fuse
- DC-DC converter 12 Vdc
- 5m cable for display, lever, key
- Quick install / easy connect / plug and play
- Inlet and outlet liquid connections
- Closed loop liquid cooling size XL mounted aboard

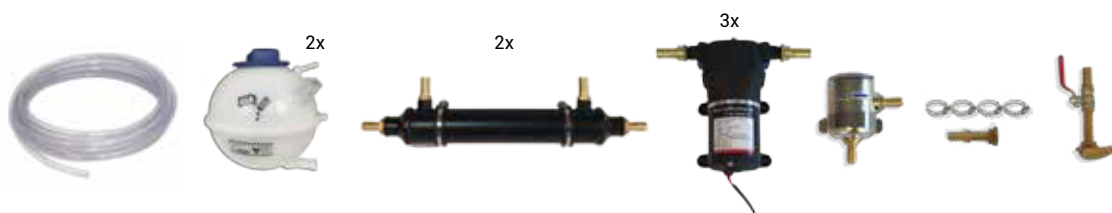

Medium & Heavy Duty

PRODUCT CODE	DESCRIPTION	MOTOR SIZE	NOMINAL kW	INTERMITTENT kW	BATTERY Vdc	MOTOR rpm
BV201450W	ModularMaster 40W EVO	2x220-20 (*)	30	40	48	1500
BV101485W	ModularMaster 40W	2x220-20	30	40	96	1500
BV101480W	ModularMaster 60W	2X220-35	50	60	144	1500

(*) Special



• Complete the scope of supply by adding control throttle, display, cooling kit, coupling, shaft with propeller